



# Control Panel

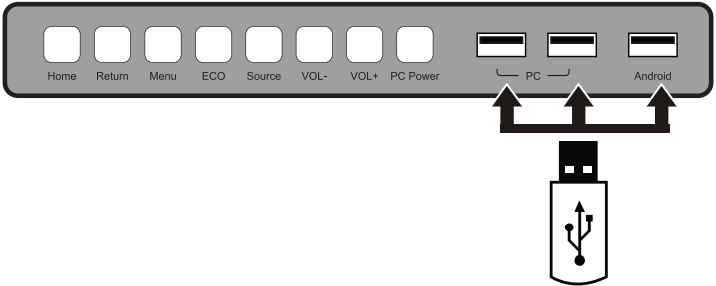

Name	Function Description
Home	Enter/Exit the Android home page.
Return	Return to previous menu.
Menu	Enter/Exit the function menu of screen.
ECO	Switch among three modes: energy-saving, automatic, and standard.
Source	Enter the menu to select the signal source.
VOL-	Decrease volume.
VOL+	Increase volume.
PC Power	Power on or off the OPS.
PC	The USB 2.0 and USB 3.0 ports for the OPS.
Android	Android USB port.


# Connection Panel 1

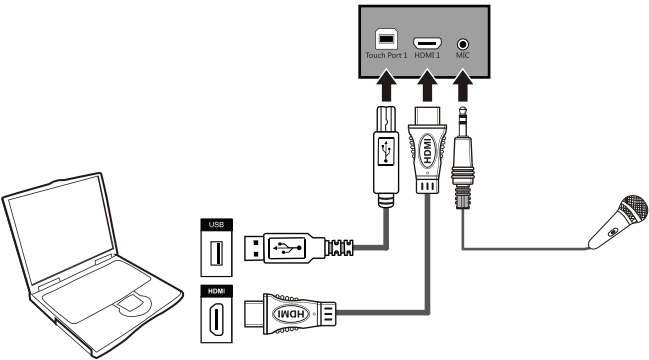

Name	Function Description
Touch Port 1	The touch control terminal 1 which is used to connect to a PC.
HDMI 1	The input terminal 1 for high definition signal, which is used with the touch port 1 to operate PC in the way of touch control.
MIC	The external microphone port.


NOTE : Touch Port 1 corresponds to HDMI 1, and Touch Port 2 corresponds to VGA In, HDMI 2 and HDMI 3.

## Connection Panel 2

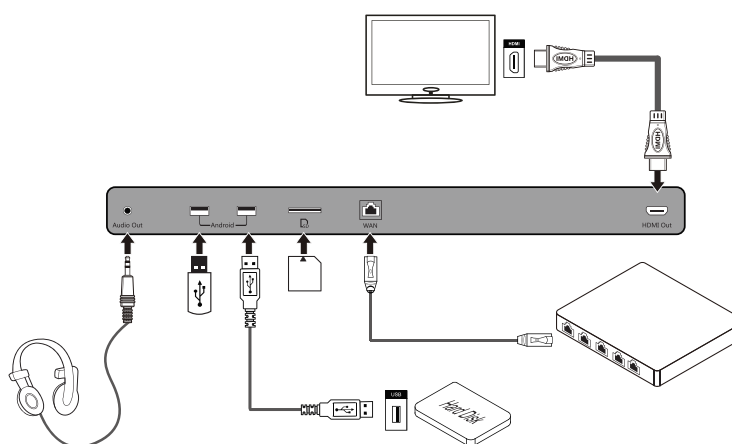

Name	Function Description
Audio Out	The terminal for external loudspeaker boxes or headphones.
Android	The USB 2.0 and USB 3.0 ports for connecting to the Android system.
SD	The external port for the SD card.
WAN	The port for wide area network, which is used to connect to external network.
HDMI Out	The output terminal for high definition signal, which can transmit the signal to other display equipment with high definition.

### Connection Panel 3

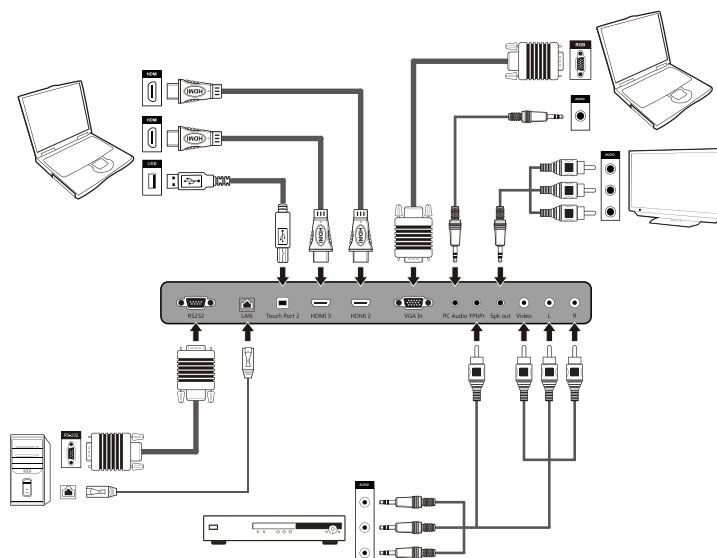

Name	Function Description
RS232	The input port for series signals, which is used by specific control device of serial port to input serial port protocol in order to control the panel.
LAN	The port for local area network, which is used to connect to internal network.
Touch Port 2	The terminal 2 for touch control signal.
HDMI 3	The input terminal 3 for high definition signal, which is used with the touch port 2 to operate PC in the way of touch control.
HDMI 2	The input terminal 2 for high definition signal, which is used with the touch port 2 to operate a PC in the way of touch control.
VGA In	The VGA port for an external PC, which is used with the touch port 2 to operate the PC in the way of touch control.
PC Audio	The PC Audio is used with the VGA port for an external PC.
YPbPr	The component video terminal, which is used to connect to video devices such as the HD digital signal STB, the satellite receiver, DVD players and other HD displays or TV equipment.
Spk out	Audio and video output terminal.
Video	An array of audio and video input terminals, which are used to input audio and video signal.
L	Video: Video input terminal. L: Left audio input terminal.
R	R: Right audio input terminal.

NOTE : 1. Please use the cable provided with the product to connect to device.

2. HDMI 1, HDMI 2 and HDMI 3 are high-definition multimedia ports, which are used to provide home theatre experience with the best quality for consumers by transmitting high-definition, all-digital audio and video. If there is an HDMI port on the external device, you are advised to connect it with the product by using the HDMI cable in order to display better image and sound effect.