

LUXOR LEMRO Instructions.


Pull out Keyboard to suit LE40N or LELBDUON Trolleys.

Contents: Black shelf
2 sets ball bearing slides
4 L-shaped silver brackets
4 Flat silver brackets
Packet of screws (8 x threaded bolts;
14 x self tapping screws)
Single self tapping screw (for starting
screw thread in shelf)




Installation:

1. Attach the slides to the shelf using the self tapping screws in the packet. Start by using the single screw to “tap” the thread in the existing hole, and then use the packet screws to secure the slide to the shelf.

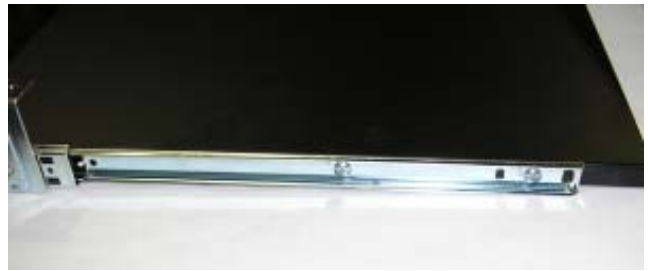

2. Attach the 4 flat brackets to the slides using the threaded bolts through the large countersunk hole in the bracket, and into the slide.

3. Attach the 4 L- brackets to the underside of the LE trolley top shelf using the 4 special lugs with holes to match the bracket holes. (see pic).

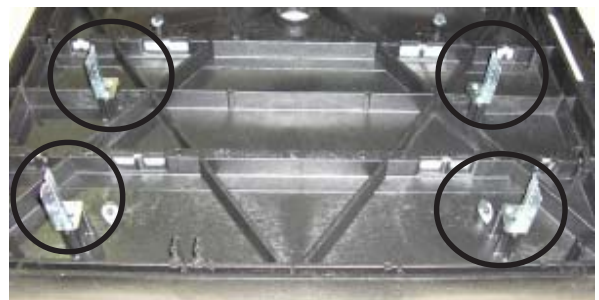

4. Align the brackets on the shelf with the brackets attached to the shelf, and place the shelf onto the L-brackets of the top shelf. Insert the remaining 4 threaded bolts to secure the shelf to the L-brackets.



The top shelf with slide out keyboard shelf can now be put back with the remaining trolley parts to complete the trolley.

abi

a brighter IMAGE P/L

Brookvale, NSW

Helpline: 02.9638 6866